

NARF ACCESSIBILITY SURVEY FORM A: PARKING

Total parking in lot	Required minimum # of accessible spaces
1 to 25	1
26 to 50	2
51 to 75	3
76 to 100	4
101 to 150	5
151 to 200	6
201 to 300	7
301 to 400	8
401 to 500	9
501 to 1000	2% of total
1001 & over	20+1 for each 100 over 1000

Lot Location: _____

Total # of Spaces _____

of Accessible Spaces _____

- | | | | | |
|----|-----|----|-----|---|
| 1. | YES | NO | N/A | Are the required # of accessible parking spaces provided? (The total # may be distributed among lots if greater accessibility is achieved.) (4.12[5a]) |
| 2. | YES | NO | N/A | Are accessible spaces those closest to the building's accessible entrance? (4.6.2) |
| 3. | YES | NO | N/A | If the parking facility serves more than one building or public area, are the accessible spaces those closest to the parking facility's accessible pedestrian entrance? |
| 4. | YES | NO | N/A | Are accessible spaces at least 96 inches wide with a designated adjacent accessible aisle of 60 inches? (Two spaces can share a common aisle.) (4.6.3) |
| 5. | YES | NO | N/A | If the space is designated as a van space, is the adjacent aisle at least 96 inches wide? One of every eight accessible spaces must be designated as van accessible (4.1.2[5b]) |
| 6. | YES | NO | N/A | Are the space and aisles level, with any slope no greater than 1:50 (2%)? (Thus, curb ramps cannot project into accessible aisle.) |
| 7. | YES | NO | N/A | Do van designated parking spaces have vertical clearance of at least 98 inches? (4.6.5) |
| 8. | YES | NO | N/A | Does each accessible space have a vertical sign showing universal symbol of accessibility, and is sign unobscured by a parked vehicle? (4.6.4 & 4.1.2[7]) |



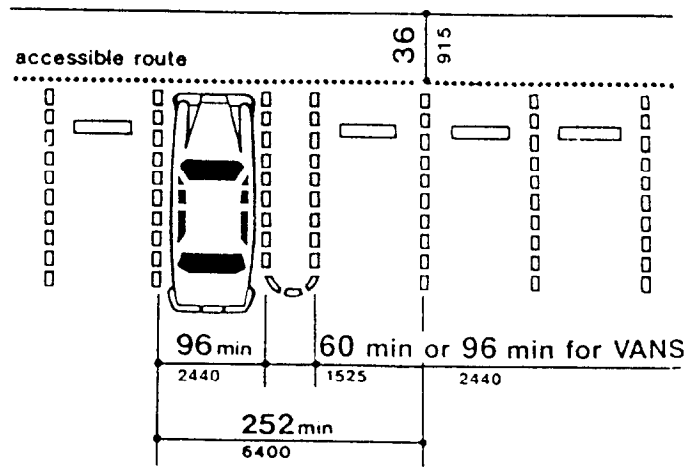


Fig. 9
Dimensions of Parking Spaces

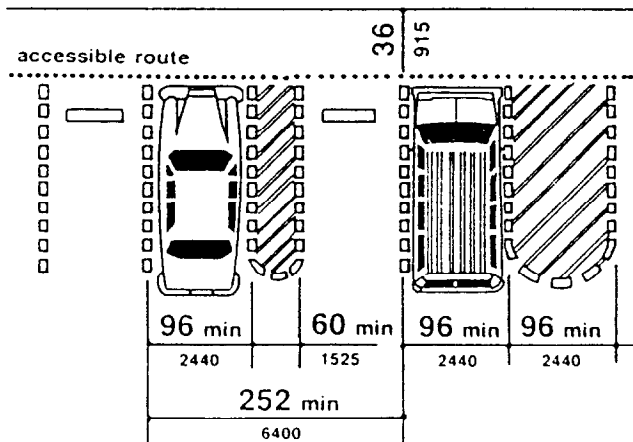

(a)
Van Accessible Space at End Row

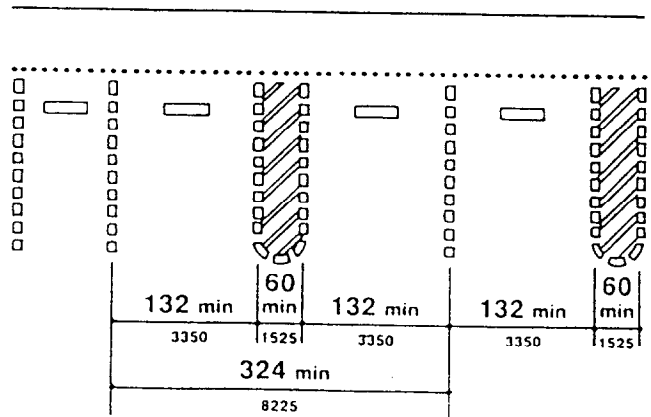

(b)
Universal Parking Space Design

Fig. A5
Parking Space Alternatives